

# LSP-98A66M88V-xx



## Features


Mylar cone loudspeaker for PMR, Handsfree and general voice applications.

Rotating bracket with fixing knob, for easy installation.



Twin flat cable with length and connector on customer's request.

Flame resistant version.

## Typical frequency response

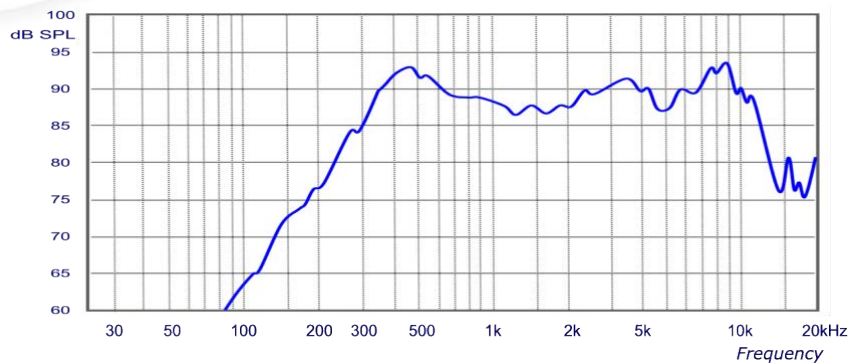

## Mechanical Layout



## Technical Specifications

Speaker' shape:	Round
Type:	Ferrite Mylar Speaker
Impedance:	8 $\Omega$ @ 1 kHz 1V
Output (SPL):	87dB $\pm$ 2dB@ 1W 1m distance (Mean value @ 0,8; 1; 1,2; 1,5 kHz)
Frequency response:	450 - 12kHz (within $\pm$ 5dB)
Distortion:	5% Max
Nominal Power:	8 W
Max Power:	10 W
Flux Density:	8000 Gauss
Buzzes & Rattle:	Normal (Sine Wave 6V)
Weight:	160 g
Case material:	ABS Matt Black - flame resistant
Cable:	Length 5 mt., without connector UL-94V0

Loudspeakers Family